





ITEM	PART NO.	DESCRIPTION
1	R203-0637-O04	Bolted Shipping Assembly, 2.030 OD X 4 FT, 6 SPF, 0°, 19 Shots
	R203-0637-O07	Bolted Shipping Assembly, 2.030 OD X 7 FT, 6 SPF, 0°, 37 Shots
	R203-0637-O11	Bolted Shipping Assembly, 2.030 OD X 11 FT, 6 SPF, 0°, 61 Shots
	R203-0637-O15	Bolted Shipping Assembly, 2.030 OD X 15 FT, 6 SPF, 0°, 85 Shots
	R203-0637-O21	Bolted Shipping Assembly, 2.030 OD X 21 FT, 6 SPF, 0°, 121 Shots
2	T138-0637-O04	Tube Strip, 1.375 OD X 4 FT, 6 SPF, 0°
	T138-0637-O07	Tube Strip, 1.375 OD X 7 FT, 6 SPF, 0°
	T138-0637-O11	Tube Strip, 1.375 OD X 11 FT, 6 SPF, 0°
	T138-0637-O15	Tube Strip, 1.375 OD X 15 FT, 6 SPF, 0°
	T138-0637-O21	Tube Strip, 1.375 OD X 21 FT, 6 SPF, 0°
3	B203-0600-O04	Bolted Carrier, 2.030 OD X 4 FT, 6 SPF, 0°
	B203-0600-O07	Bolted Carrier, 2.030 OD X 7 FT, 6 SPF, 0°
	B203-0600-O11	Bolted Carrier, 2.030 OD X 11 FT, 6 SPF, 0°
	B203-0600-O15	Bolted Carrier, 2.030 OD X 15 FT, 6 SPF, 0°
	B203-0600-O21	Bolted Carrier, 2.030 OD X 21 FT, 6 SPF, 0°
C	SDP-2125-402NT3	Charge, RTG 2-1/8", HMX - DP, SDP - HERO™ - uses Ribbon (Preferred) or 40 gr. Round Cord
	SDP-2125-402NTX	Charge, RTG 2-1/8", HMX - DP, SDP - uses Ribbon (Preferred) or 40 gr. Round Cord
	RTG-2125-402LS	Charge, RTG 2-1/8", HMX - DP, LS - uses Ribbon (Preferred) or 40 gr. Round Cord
	RTG-2125-402F	Charge, RTG 2-1/8", HMX - BH - uses Ribbon (Preferred) or 40 gr. Round Cord
	RTG-2125-302LS	Charge, RTG 2-1/8", DP, LS, RDX - uses Ribbon (Preferred) or 40 gr. Round Cord

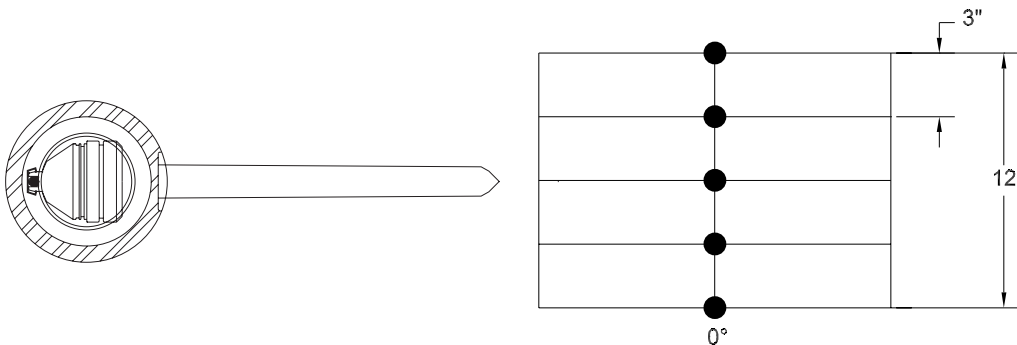

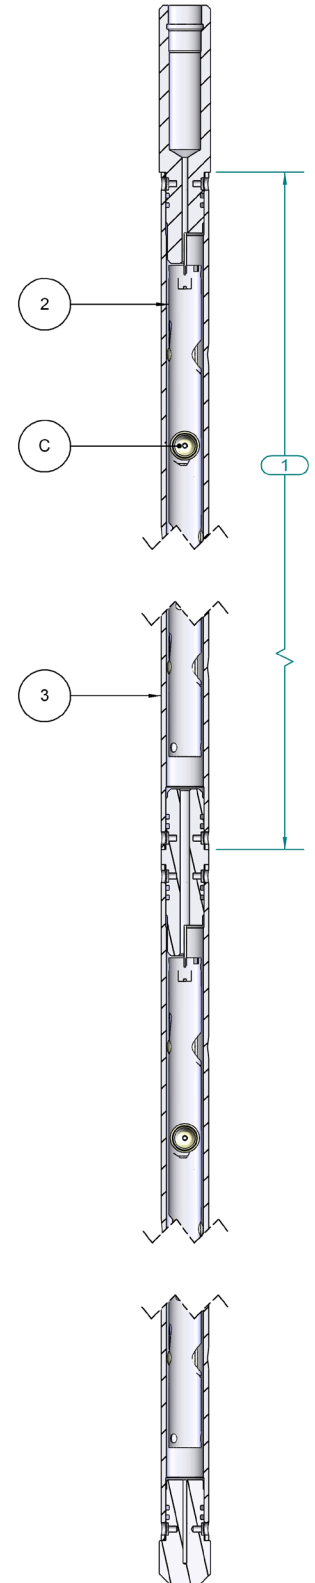

SPECIFICATIONS		
Pressure Rating	155.1 Mpa	22,500 psi
Temperature	UP TO 288°C	UP TO 550°F
Max O.D. before Firing	51.6 mm	2.032"
Max O.D. after Firing (in fluid)	52.8 mm	2.08"
Max O.D. after Firing (in gas)	53.98 mm	2.125"
Gun Weight Loaded	7.4 kg/m	5.0 lb/ft

ITEM	PART NO.	DESCRIPTION
4	RTG-2125-112	Shooting Adapter, 2-1/8" O.D.
5	RTG-2125-108	Tandem Sub, 2-1/8" Without Dart Seal
	RTG-2125-109	Tandem Sub, 2-1/8" With Dart Seal
6	RTG-2125-115	Bull Plug, 2-1/8"
7	RTG-2125-116	Blast Sleeve, 2-1/8"
8	PUR-0500-052	Socket Hd. Cap Screw, 5/16-18 x 1/4"
	PUR-0500-033	Socket Hd. Cap Screw, 1/4-20 x 3/8"
9	OOO-N569-220	O-Ring #220 Nitrile
	OOO-V569-220	O-Ring #220 Viton
A	DET-0325-011	Det Cord - Ribbon, 40 gr. RDX, Nylon LS
	DET-0412-006	Det Cord - Ribbon, 40 gr. HMX, Nylon LS
	DET-0325-013	Det Cord - Round, 40 gr. RDX, Nylon LS
	DET-0412-014	Det Cord - Round, 40 gr. HMX, Nylon LS

