

Description:

Owen’s Tubing Cutters were designed to cut tubing during Pipe Recovery Operations.


Benefits/Capabilities:

- Reduces fishing costs and uncertainty due to reduced flare over conventional jet cutters
- Reduces inventory costs by offering one cutter for multiple weights and grades of tubulars
- Cutter safety requirements are satisfied with compliance to API RP 67
- Air shippable as 1.4D

Specifications:

| RUNNING DIAMETER | | 2.062” |
|-------------------------|--|----------------------------|
| TEMPERATURE RATING (F) | | 400 |
| PRESSURE RATING (PSI) | | 15,000 |
| EXPLOSIVE WEIGHT (G) | | 18.4 |
| RECOMMENDED APPLICATION | | 2.875” TUBING, 6.5# - 8.7# |

| RUNNING DIAMETER | | 1.687” |
|-------------------------|--|-----------------------------|
| TEMPERATURE RATING (F) | | 400 |
| PRESSURE RATING (PSI) | | 15,000 |
| EXPLOSIVE WEIGHT (G) | | 11.1 |
| RECOMMENDED APPLICATION | | 2.375” TUBING, 4.7# - 5.95# |

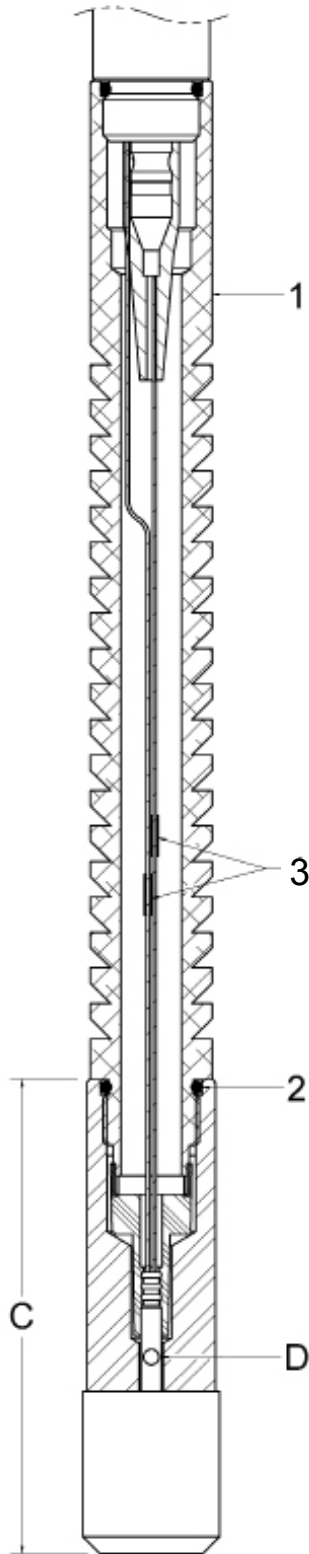

| ITEM | DESCRIPTION | PART NUMBER |
|------|---------------------------------|---------------|
| 1 | ALUMINUM SHOCK SUB - OPEN BORE | CUT-0100-079 |
| | STEEL EXTENSION ADAPTER | CUT-0100-087 |
| 2 | O-RING FOR ADAPTER | OOO-V569-214 |
| 3 | SPLICE BOOT | PUR-0210-001 |
| C | 2.062" TUBING CUTTER | CUT-2062-409 |
| D | DETONATOR | DET-3050-009L |
| - | RP-67 ARMING SHIELD (NOT SHOWN) | CUT-2062-047 |

- Items 1 - 3 and detonator must be ordered separately from cutter assembly.
- Alternate arming assembly available, using JRC style extension adapter with button contacts, CUT-0100-078 and detonator with spring contacts, DET-3050-009E for 1.56" and larger cutters.
- Owen recommends running a minimum of two bowsprings centralizers with these tubing cutters. The recommended part number for this 1.687" Bowspring Centralizer is AES-AS60066-6.

WARNING


Use of Owen equipment contrary to manufacturer's specifications may result in property damage, serious injury or fatality. If you are not trained in the handling and use of explosive devices, do not attempt to assemble any Owen Perforating Systems or Owen Firing Devices.

For Technical Assistance, Please Contact:

Owen Oil Tools
12001 County Road 1000
Godley, TX. 76044

Tel: (817) 551-0540 Fax: (817) 551-0795

<http://www.corelab.com/owen>

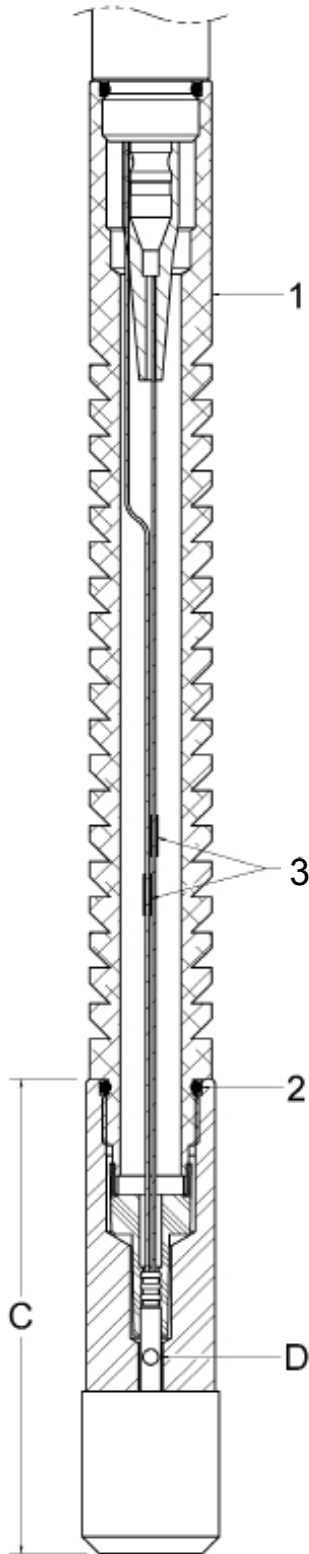

| ITEM | DESCRIPTION | PART NUMBER |
|------|---------------------------------|---------------|
| 1 | ALUMINUM SHOCK SUB - OPEN BORE | CUT-0100-079 |
| | STEEL EXTENSION ADAPTER | CUT-0100-087 |
| 2 | O-RING FOR ADAPTER | OOO-V569-214 |
| 3 | SPLICE BOOT | PUR-0210-001 |
| C | 1.687" TUBING CUTTER | CUT-1687-409 |
| D | DETONATOR | DET-3050-009L |
| - | RP-67 ARMING SHIELD (NOT SHOWN) | CUT-1687-046 |

- Items 1 - 3 and detonator must be ordered separately from cutter assembly.
- Alternate arming assembly available, using JRC style extension adapter with button contacts, CUT-0100-078 and detonator with spring contacts, DET-3050-009E for 1.56" and larger cutters.
- Owen recommends running a minimum of two bowsprings centralizers with these tubing cutters. The recommended part number for this 1.687" Bowspring Centralizer is AES-AS60066-6.

WARNING

Use of Owen equipment contrary to manufacturer's specifications may result in property damage, serious injury or fatality. If you are not trained in the handling and use of explosive devices, do not attempt to assemble any Owen Perforating Systems or Owen Firing Devices.

For Technical Assistance, Please Contact:

Owen Oil Tools
12001 County Road 1000
Godley, TX. 76044

Tel: (817) 551-0540 Fax: (817) 551-0795

<http://www.corelab.com/owen>