


Drain Sub - TT0711

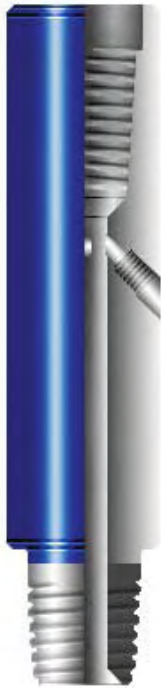

Description

The Drain Sub is used to prevent the tool string from holding fluid when coming out of the hole. The Drain Sub has threaded ports. These ports can be used to close off the side ports with brass screws to direct full circulation through the tool.

Operation

The Drain Sub is usually run above a box or tapered tap. Once the tap has engaged the fish, the fish often becomes plugged, that would result in pulling a 'wet' string. The sub allows the fluid to drain to the annulus. Do not run a Drain Sub with any hydraulic tool as it will not allow the hydraulic tool to function properly and the sub's screws are not rated for hydraulic tool operation.



Special Order Item - Contact your TTT representative for more information or pricing.