

Description:


Owen's Tubing Cutters are designed to cut tubing during Pipe Recovery Operations.

Benefits/Capabilities:

- "Air shippable" at Class 1.4S
- Conforms to API RP-67
- Cutters should be centralized and run in recommended applications to maximize effectiveness of tool.

Specifications:

RUNNING DIAMETER	1.230"	1.390"	1.560"
Temperature Rating (F)	400 - 500	400 - 500	400 - 500
Pressure Rating (PSI)	12,000	15,000	15,000
Explosive Weight (g)	14.0	20.0	13.0
Recommended Application	1.66" Tubing, 2.4#	1.90" Tubing, 2.9#	2.062" Tubing, 3.25#

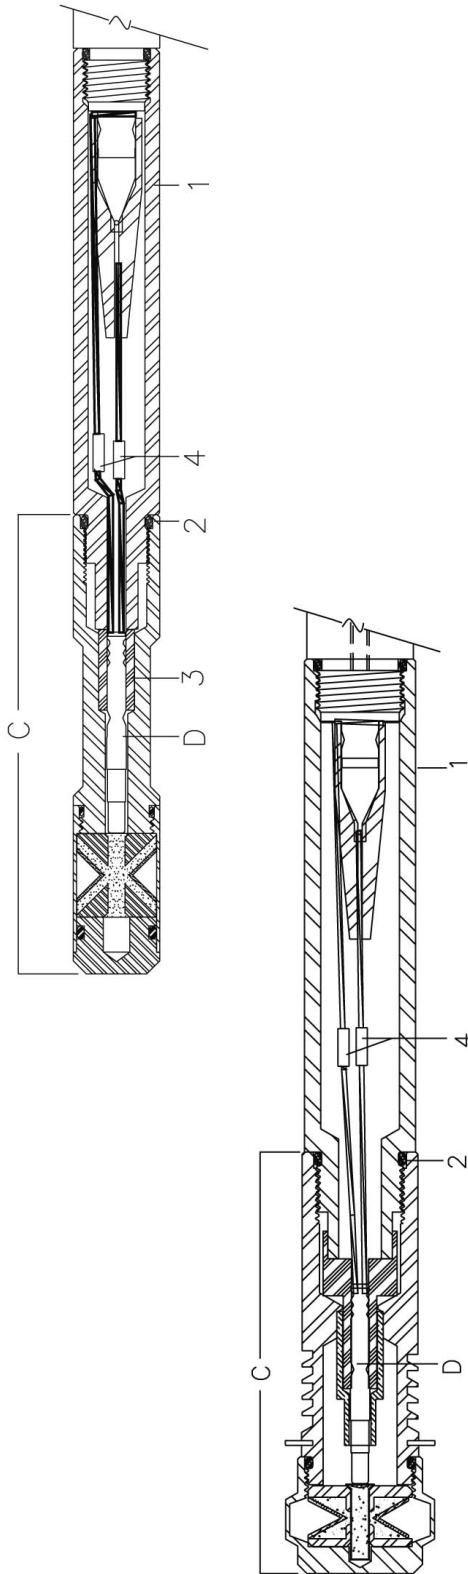

ITEM	DESCRIPTION	PART NUMBER	
		1.156"-1.46"	1.56"
1	Steel Extension Adapter	CUT-1156-050	CUT-0100-087
	Aluminum Shock Sub - Open Bore	-	CUT-0100-079
2	O-ring for Adapter	OOO-V569-210	OOO-V569-214
3	Detonator Sleeve	DET-3050-051	-
4	Splice Boot	PUR-0210-001	PUR-0210-001
D	Detonator	DET-3050-009LS or 2-300750-1	DET-3050-009L or DET-3050-409
	1.230" Tubing Cutter	CUT-1230-402	-
	1.390" Tubing Cutter	CUT-1390-402	
C	1.560" Tubing Cutter	-	CUT-1560-402

- Items 1 - 4 and detonator must be ordered separately from cutter assembly.
- HNS Cutters are available by special order. Parts should be ordered by replacing the 402 with 503, ie. CUT-XXXX-503.
- Alternate arming assembly available, using JRC style extension adapter with button contacts, CUT-0100-078 and detonator with spring contacts, DET-3050-009E for 1.56".

NOTE: Tubing Cutters can be run using Safe Detonator Systems. Please Reference Safe Ignition Systems Section of Owen Catalog.

WARNING

Use of Owen equipment contrary to manufacturer's specifications may result in property damage, serious injury or fatality. If you are not trained in the handling and use of explosive devices, do not attempt to assemble any Owen Perforating Systems or Owen Firing Devices.

For Technical Assistance, Please Contact:
Owen Oil Tools
12001 County Road 1000
Godley, TX. 76044
Tel: (817) 551-0540 Fax: (817) 551-0795
<http://www.corelab.com/owen>